




Cantilevered Rotation Fixture

Creating a model number

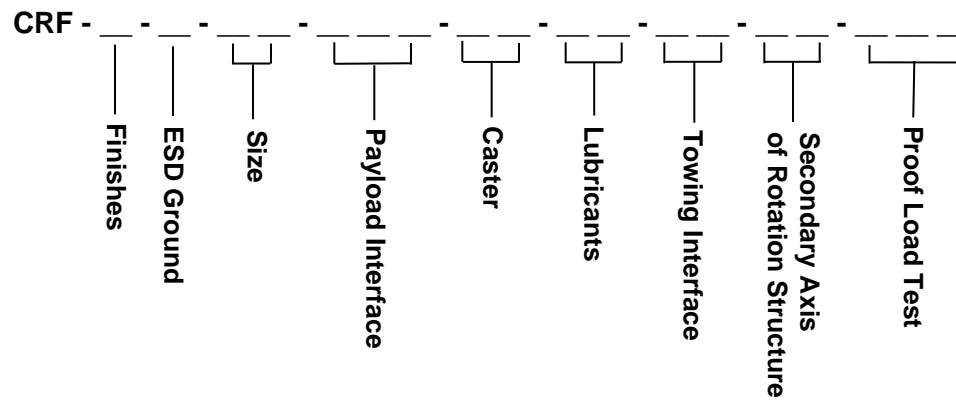

Finishes

- (blank) - Standard Finish
- C** - - - - Clean Room finishes
- N** - - - - Electroless Nickel Plate

ESD Ground

- E** - - - - Ground Lug and Drag Chain for use in EPA's

Size

- 36** - - - 36" Swing Radius
- 48** - - - 48" Swing Radius
- 60** - - - 60" Swing Radius

Payload Interface

- P12** - - Standard Ø12" Circular Interface Plate with 12X through holes for 1/2" fasteners on Ø10" bolt circle

Proof Load Test

- (blank) - No Proof Load Test
- PLT** - - - Standard Proof Load Test (includes deliverable report)

Secondary Axis of Rotation Structure

- (blank) - No secondary axis of rotation
- SA** - - - - Secondary axis of rotation

Tow Bar

- (blank) - No Tow Bar
- T1** - - - - Tow Bar included

Lubricants

- (blank) - Caster swivel bearings lubricated with Krytox GPL 207
- L1** - - - - Caster swivel bearings lubricated with Braycote 601EF

Caster

- C6** - - Ø6" x 3" Heavy Duty Phenolic Wheel Caster with Brakes, Swivel Locks, and steering bar receptacle.

Example:

