




## SFP-900 Series

Creating a model number

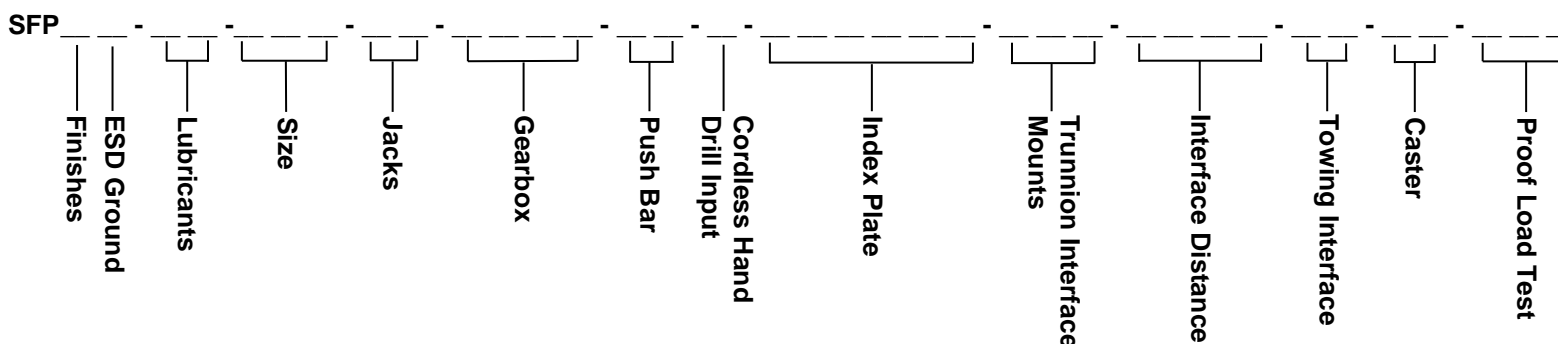

### Finishes

(blank) - Standard finishes (No Zinc)  
**C** - - - - - Clean Room finishes

### ESD Ground

(blank) - No ESD Ground  
**E** - - - - - Ground Lug and Drag Chain for use in EPA's

### Lubricants

(blank) - Standard lubricants  
**L1** - - - - - Trunnions, caster swivel bearings, and jacks (if applicable) lubricated with Krytox GPL 207  
**L2** - - - - - Trunnions, caster swivel bearings, and jacks (if applicable) lubricated with Braycote 601EF  
 NOTE: "C" finish includes L1 Lubricants

### Size

**974** - - 74" Wide frame

### Jacks

(blank) - No provision for Jacks  
**J2** - - - - - Jacks Frame-mounted leveling/stabilizing  
**J3** - - - - - Jacks Frame-mounted with leveling foot "F1"

### Gearbox

**DR06** - - - - - 600:1 Low Backlash Gearbox  
**DR09** - - - - - 900:1 Low Backlash Gearbox

### Push Bar

(blank) - No Push Bar  
**P1** - - - - - End Frame-mounted Push Bar

### Cordless Hand Drill Input

(blank) - - - No hand drill  
**D** - - - - - - - Battery powered hand drill mounted to gearbox input shaft

### Proof Load Test

(blank) - - No Proof Load Test  
**PLT** - - - - - Standard Proof Load Test (includes deliverable report)

### Caster

(blank) - Ø8" Nylatron caster with brake & swivel lock

### Towing Interface

(blank) - No Towing Interface  
**T1** - - - - - Removable Lunette Ring Towing Interface (attaches to main beam)  
**T2** - - - - - Removable Ball Coupler Towing Interface (attaches to main beam)  
**T3** - - - - - Removable Tow Bar (attaches to end frames)

### Interface Distance

**B"XXX"** - - Interface distance where "XXX" = length in inches between trunnion interface mounts. (1" increments within the following range)

MODEL	MIN	MAX
974	35"	350"

### Trunnion Interface Mounts

**P13** - - - - - 9" x 13" Mounting Plate  
 NOTE: Special Interface mounts available upon request.

### Index Plate

**IND15** - - - 15° Index Plate  
**INDS15** - - - 15° Index Plate with Index Stops  
 NOTE: Special index plate hole spacing available upon request. SFP-974 comes standard with IND15 option.

### Example:

