




SFP-900 Series

Creating a model number

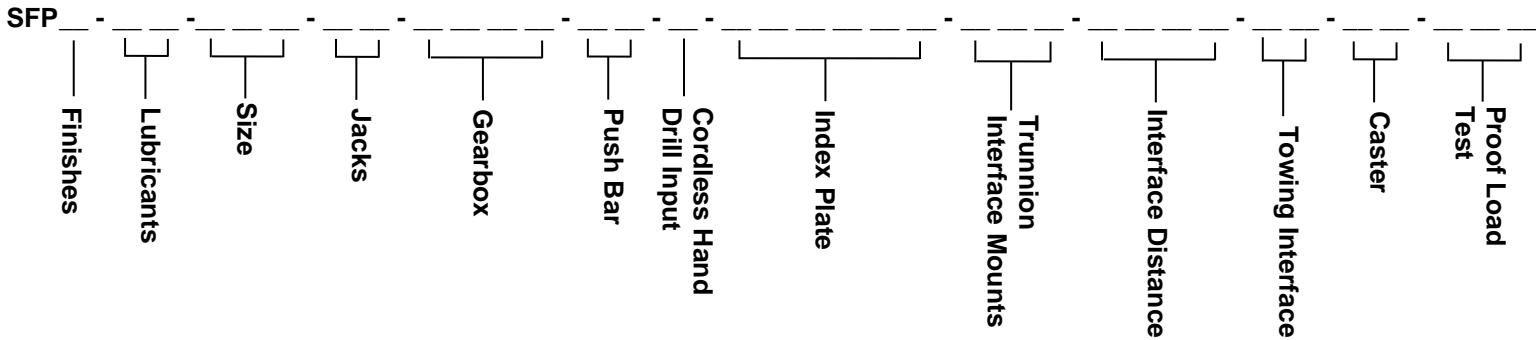

Finishes

(blank) - Standard finishes (No Zinc)
C - - - - - Clean Room finishes

Lubricants

(blank) - Standard lubricants
L1 - - - - Trunnions, caster swivel bearings, and jacks (if applicable) lubricated with Krytox GPL 217
L2 - - - - Trunnions, caster swivel bearings, and jacks (if applicable) lubricated with Braycote 631RP
NOTE: “C” finish includes L1 Lubricants

Size

974 - - 74” Wide frame

Jacks

(blank) - No provision for Jacks
J2 - - - - Jacks Frame-mounted leveling/stabilizing
J3 - - - - Jacks Frame-mounted with leveling foot “F1”
J4 - - - - Jacks Frame-mounted with vibration-isolating plate “V1”

Gearbox

DR06 - - - - 600:1 Low Backlash Gearbox
DR09 - - - - 900:1 Low Backlash Gearbox

Push Bar

(blank) - No Push Bar
P1 - - - - End Frame-mounted Push Bar

Cordless Hand Drill Input

(blank) - - - No hand drill
D - - - - - Battery powered hand drill mounted to gearbox input shaft

Proof Load Test

(blank) - - No Proof Load Test
PLT - - - - Standard Proof Load Test (includes deliverable report)

Caster

(blank) - Ø8” Nylon caster with brake & swivel lock, no Steering Bars

Towing Interface

(blank) - No Towing Interface
T1 - - - - Removable Lunette Ring Towing Interface (attaches to main beam)
T2 - - - - Removable Ball Coupler Towing Interface (attaches to main beam)
T3 - - - - Removable Tow Bar (attaches to end frames)

Interface Distance

B”XXX”- - Interface distance where “XXX” = length in inches between trunnion interface mounts. (1” increments within the following range)

MODEL	MIN	MAX
974	35”	350”

Trunnion Interface Mounts

P13 - - - - - 9” x 13” mounting plate with 8 through holes
P13/B36 - - - - - P13 (8 bolts, 9” x 13”) mounting plate and standard 36” long horizontal interface adapter (with standard mounting hole pattern) bolted to P13.
NOTE: Special Interface mounts available upon request.

Index Plate

IND15 - - - 15° Index Plate
INDS15- - -15° Index Plate with Index Stops
NOTE: Special index plate hole spacing available upon request. SFP-974 comes standard with IND15 option.

Example:

